

Our aluminum cam-locks are manufactured from aluminum alloy 384 (JIS grade ADS12) and feature type 316 stainless pins, forged brass handles, and plated steel finger rings. G65 couplings fit Commercial Item Description (CID) #A-A-59326B for sizes 3/4" to 6" and will interchange with other couplings that meet this specification. No government standard has been established for 1/2", 8" and 10" so different manufacturers' couplings may not interchange in this size. Female couplers are supplied with locking clips.

Aluminum working pressures:

1/2" to 2"	250 psi
2 1/2" to 4"	150
5" & 6"	75
8"	50

Standard gaskets are rated to 105°C (221°F)

Part No. Size IMPA Code PRICE EACH

G65A... PART A FEMALE NPT ADAPTER

G65A-050	1/2"	35-17-01	\$ 3.30
G65A-075	3/4"	35-17-02	3.30
G65A-100	1"	35-17-03	3.50
G65A-125	1 1/4"	35-17-04	4.50
G65A-150	1 1/2"	35-17-05	4.30
G65A-200	2"	35-17-06	4.90
G65A-250	2 1/2"	35-17-07	8.90
G65A-300	3"	35-17-08	8.70
G65A-400	4"	35-17-09	14.60
G65A-500	5"	35-17-10	34.90
G65A-600	6"	35-17-11	33.20
G65A-800	8"	35-17-12	158.60
G65A-1000	10"		337.10



G65B... PART B MALE NPT COUPLER

G65B-050	1/2"	35-18-51	\$ 6.70
G65B-075	3/4"	35-18-52	7.50
G65B-100	1"	35-18-53	8.50
G65B-125	1 1/4"	35-18-54	10.60
G65B-150	1 1/2"	35-18-55	10.60
G65B-200	2"	35-18-56	11.20
G65B-250	2 1/2"	35-18-57	16.80
G65B-300	3"	35-18-58	18.80
G65B-400	4"	35-18-59	27.20
G65B-500	5"	35-18-60	62.80
G65B-600	6"	35-18-61	60.40
G65B-800	8"	35-18-62	307.70
G65B-1000	10"		546.10



G65C... PART C HOSE SHANK COUPLER

G65C-050	1/2"		\$ 5.90
G65C-075	3/4"	35-20-01	6.10
G65C-100	1"	35-20-02	7.00
G65C-125	1 1/4"	35-20-03	10.00
G65C-150	1 1/2"	35-20-04	9.90
G65C-200	2"	35-20-05	11.60
G65C-250	2 1/2"	35-20-06	17.20
G65C-300	3"	35-20-07	19.60
G65C-400	4"	35-20-08	26.00
G65C-500	5"	35-20-09	65.60
G65C-600	6"	35-20-10	60.40
G65C-800	8"	35-20-11	296.10
G65C-1000	10"		719.50



Part No. Size IMPA Code PRICE EACH

G65D... PART D FEMALE NPT COUPLER

G65D-050	1/2"	35-18-01	\$ 7.20
G65D-075	3/4"	35-18-02	7.60
G65D-100	1"	35-18-03	8.20
G65D-125	1 1/4"	35-18-04	10.90
G65D-150	1 1/2"	35-18-05	10.20
G65D-200	2"	35-18-06	11.10
G65D-250	2 1/2"	35-18-07	18.00
G65D-300	3"	35-18-08	18.90
G65D-400	4"	35-18-09	28.20
G65D-500	5"	35-18-10	54.30
G65D-600	6"	35-18-11	59.30
G65D-800	8"	35-18-12	282.50
G65D-1000	10"		546.10



G65E... PART E HOSE SHANK ADAPTER

G65E-050	1/2"		\$ 3.70
G65E-075	3/4"	35-19-01	3.50
G65E-100	1"	35-19-02	4.00
G65E-125	1 1/4"	35-19-03	5.30
G65E-150	1 1/2"	35-19-04	5.00
G65E-200	2"	35-19-05	6.30
G65E-250	2 1/2"	35-19-06	10.80
G65E-300	3"	35-19-07	12.60
G65E-400	4"	35-19-08	20.90
G65E-500	5"	35-19-09	48.50
G65E-600	6"	35-19-10	51.20
G65E-800	8"	35-19-11	189.50
G65E-1000	10"		447.30



G65F... PART F MALE NPT ADAPTER

G65F-050	1/2"	35-17-51	\$ 4.20
G65F-075	3/4"	35-17-52	4.20
G65F-100	1"	35-17-53	4.60
G65F-125	1 1/4"	35-17-54	6.20
G65F-150	1 1/2"	35-17-55	5.40
G65F-200	2"	35-17-56	6.50
G65F-250	2 1/2"	35-17-57	11.80
G65F-300	3"	35-17-58	12.50
G65F-400	4"	35-17-59	20.40
G65F-500	5"	35-17-60	48.80
G65F-600	6"	35-17-61	46.70
G65F-800	8"	35-17-62	200.00
G65F-1000	10"		367.60



Safety Note: Cam-locks should not be used with compressed air or other compressed gases.

ALUMINUM CAM-LOCKS

SPECIALTY ALUMINUM CAM-LOCKS

Part No. Size IMPA Code PRICE EACH

G65DC... PART DC DUST CAP



G65DC-050	1/2"		\$ 5.70
G65DC-075	3/4"	35-20-51	6.50
G65DC-100	1"	35-20-52	7.40
G65DC-125	1 1/4"	35-20-53	9.90
G65DC-150	1 1/2"	35-20-54	8.90
G65DC-200	2"	35-20-55	10.00
G65DC-250	2 1/2"	35-20-56	13.30
G65DC-300	3"	35-20-57	16.00
G65DC-400	4"	35-20-58	22.90
G65DC-500	5"	35-20-59	44.10
G65DC-600	6"	35-20-60	51.50
G65DC-800	8"	35-20-61	241.00
G65DC-1000	10"		500.90

G65DP... PART DP DUST PLUG



G65DP-050	1/2"		\$ 2.90
G65DP-075	3/4"	35-19-51	2.80
G65DP-100	1"	35-19-52	3.40
G65DP-125	1 1/4"	35-19-53	4.10
G65DP-150	1 1/2"	35-19-54	3.60
G65DP-200	2"	35-19-55	4.70
G65DP-250	2 1/2"	35-19-56	7.90
G65DP-300	3"	35-19-57	7.70
G65DP-400	4"	35-19-58	12.80
G65DP-500	5"	35-19-59	28.00
G65DP-600	6"	35-19-60	29.40
G65DP-800	8"	35-19-61	146.80
G65DP-1000	10"		249.20

Part No. Size Size PRICE EACH

G65AA... ALUMINUM DOUBLE MALE ADAPTER



G65AA-150-150	1 1/2"	1 1/2"	\$ 19.90
G65AA-200-200	2"	2"	22.10
G65AA-300-200	3"	2"	26.90
G65AA-300-300	3"	3"	37.80
G65AA-400-300	4"	3"	36.80
G65AA-400-400	4"	4"	47.70
G65AA-600-400	6"	4"	85.90

G65DD... ALUMINUM DOUBLE FEMALE COUPLER



G65DD-200-200	2"	2"	\$ 57.10
G65DD-300-200	3"	2"	64.30
G65DD-300-300	3"	3"	77.30
G65DD-400-300	4"	3"	84.10
G65DD-400-400	4"	4"	87.80

CAM-LOCKS FOR INTERLOCKING CRIMP FERRULES

G64 fittings feature a collar that, when used with G3F crimp ferrules, locks the coupling to the ferrule for extra fitting retention.

G64C... CRIMP STYLE HOSE SHANK COUPLER




G64C-150	1 1/2"	\$ 10.70
G64C-200	2"	12.50
G64C-300	3"	21.20
G64C-400	4"	28.10
G64C-600	6"	65.40

G64E... CRIMP STYLE HOSE SHANK ADAPTER



G64E-150	1 1/2"	\$ 5.90
G64E-200	2"	7.00
G64E-300	3"	14.80
G64E-400	4"	24.50
G64E-600	6"	56.80

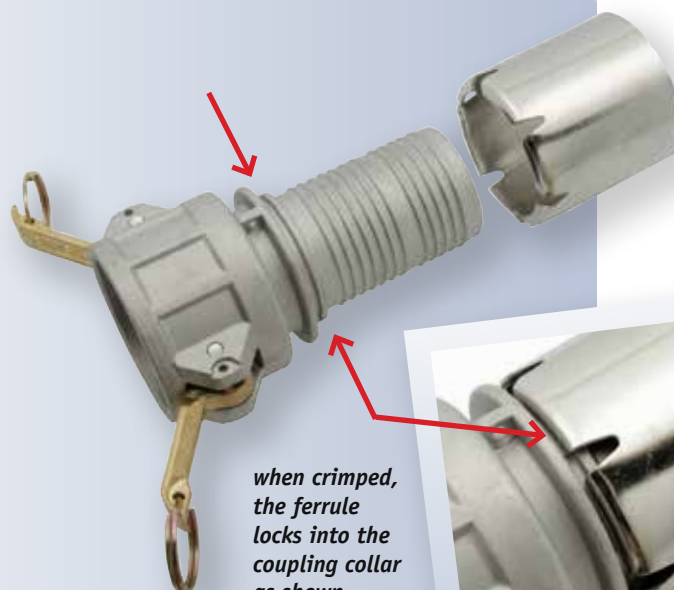

when crimped, the ferrule locks into the coupling collar as shown...

Safety Note: Cam-locks should not be used with compressed air or other compressed gases.

Part No. Size PRICE EACH

G65LC... LOCKING ARM HOSE SHANK COUPLER

		
G65LC-200	2"	\$ 79.00
G65LC-300	3"	111.20
G65LC-400	4"	140.80

G65LD... LOCKING ARM FEMALE NPT COUPLER

		
G65LD-150	1 1/2"	\$ 67.10
G65LD-200	2"	73.10
G65LD-300	3"	104.90
G65LD-400	4"	135.40

G65LDC... LOCKING ARM DUST CAP

		
G65LDC-200	2"	\$ 71.90
G65LDC-300	3"	95.90
G65LDC-400	4"	116.00

G66LC... RING STYLE LOCKING ARM HOSE SHANK COUPLER

		
G66LC-200	2"	\$ 39.60
G66LC-300	3"	66.00
G66LC-400	4"	84.90

G66LD... RING STYLE LOCKING ARM FEMALE NPT COUPLER

		
G66LD-200	2"	\$ 38.10
G66LD-300	3"	61.80
G66LD-400	4"	95.40

G66LDC... RING STYLE LOCKING ARM DUST CAP

		
G66LDC-200	2"	\$ 32.60
G66LDC-300	3"	43.60
G66LDC-400	4"	66.00

Part No. Size PRICE EACH

G65DCL... LOCKABLE DUST CAP

Arms can be secured with a pad-lock (lock not included)

		
G65DCL-150	1 1/2"	\$ 15.40
G65DCL-200	2"	17.50
G65DCL-300	3"	32.20
G65DCL-400	4"	37.90

G65CV... HOSE SHANK COUPLER WITH PROBE FOR VAPOR RECOVERY

				
	Cam Size	Hose Size		
G65CV-300-300	3"	3"		\$ 116.00
G65CV-400-300	4"	3"		132.00

Probe opens poppet on vapor valve in service station tanker delivery vapor recovery systems

G65CA... ALUMINUM REDUCER ADAPTER



	Female Size	Male Size	
G65CA-150-200	1½"	2"	\$ 35.20
G65CA-200-150	2"	1½"	35.20
G65CA-200-300	2"	3"	50.10
G65CA-200-400	2"	4"	67.40
G65CA-300-200	3"	2"	53.00
G65CA-300-400	3"	4"	75.50
G65CA-400-200	4"	2"	73.00
G65CA-400-300	4"	3"	73.20
G65CA-400-600	4"	6"	139.40
G65CA-600-300	6"	3"	246.80
G65CA-600-400	6"	4"	141.10

G65AW... ALUMINUM SOCKET WELD ADAPTER

		
G65AW-400	4"	\$ 41.30

Safety Note: Cam-locks should not be used with compressed air or other compressed gases.

NYLON CAM-LOCKS

Nylon and Polypropylene cam-locks are fibreglass reinforced for extra strength. They are often used where weight is a concern; for example on portable forest fire fighting equipment. All sizes come complete with stainless arms. The yellow nylon parts are favored for their strength, while black polypropylene is more economical, and suitable for a wider range of chemicals. Female couplers are supplied with locking clips. Nylon parts are shown here.

*WORKING PRESSURES AT 20°C:

3/4" to 2"	100 psi
3" & 4"	50 psi

*As temperatures rise, working pressures for these cam-locks drops dramatically. At 93°C, pressure ratings are reduced by 50% for nylon and polypropylene fittings.

Part No.	Size	PRICE EACH
----------	------	------------

G65NA NYLON PART A FEMALE NPT ADAPTER

G65NA-100	1"	\$ 3.50
G65NA-150	1 1/2"	5.30
G65NA-200	2"	6.60
G65NA-300	3"	14.20
G65NA-400	4"	29.40



G65NB... NYLON PART B MALE NPT COUPLER

G65NB-100	1"	\$ 10.70
G65NB-150	1 1/2"	14.10
G65NB-200	2"	18.60
G65NB-300	3"	28.50
G65NB-400	4"	45.50



G65NC... NYLON PART C HOSE SHANK COUPLER

G65NC-100	1"	\$ 10.10
G65NC-150	1 1/2"	14.10
G65NC-200	2"	18.60
G65NC-300	3"	28.50
G65NC-400	4"	45.50



G65ND... NYLON PART D FEMALE NPT COUPLER

G65ND-100	1"	\$ 10.40
G65ND-150	1 1/2"	14.70
G65ND-200	2"	18.60
G65ND-300	3"	28.50
G65ND-400	4"	45.50



Part No.	Size	PRICE EACH
----------	------	------------

G65NE... NYLON PART E HOSE SHANK ADAPTER

G65NE-100	1"	\$ 4.00
G65NE-150	1 1/2"	6.00
G65NE-200	2"	7.80
G65NE-300	3"	14.90
G65NE-400	4"	26.40



G65NF... NYLON PART F MALE NPT ADAPTER

G65NF-100	1"	\$ 4.70
G65NF-150	1 1/2"	6.20
G65NF-200	2"	8.30
G65NF-300	3"	17.30
G65NF-400	4"	27.80



G65NDC... NYLON PART DC DUST CAP

G65NDC-100	1"	\$ 9.50
G65NDC-150	1 1/2"	13.30
G65NDC-200	2"	15.60
G65NDC-300	3"	25.80
G65NDC-400	4"	39.00



G65NDP... NYLON PART DP DUST PLUG

G65NDP-100	1"	\$ 3.50
G65NDP-150	1 1/2"	4.30
G65NDP-200	2"	5.60
G65NDP-300	3"	14.90
G65NDP-400	4"	21.70



Safety Note: Cam-locks should not be used with compressed air or other compressed gases.

*WORKING PRESSURES AT 20°C:

3/4" to 2"	100 psi
3" & 4"	50 psi

*As temperatures rise, working pressures for these cam-locks drops dramatically. At 93°C, pressure ratings are reduced by 50% for nylon and polypropylene fittings.

Part No. Size PRICE EACH

G65PA... POLYPROPYLENE PART A FEMALE NPT ADAPTER

G65PA-075	3/4"		\$ 1.80
G65PA-100	1"		2.10
G65PA-125	1 1/4"		2.40
G65PA-150	1 1/2"		2.80
G65PA-200	2"		3.20
G65PA-300	3"		7.90
G65PA-400	4"		16.20

G65PB... POLYPROPYLENE PART B MALE NPT COUPLER

G65PB-075	3/4"		\$ 6.00
G65PB-100	1"		7.20
G65PB-125	1 1/4"		9.40
G65PB-150	1 1/2"		9.80
G65PB-200	2"		11.60
G65PB-300	3"		19.00
G65PB-400	4"		31.90

G65PC... POLYPROPYLENE PART C HOSE SHANK COUPLER

G65PC-075	3/4"		\$ 5.50
G65PC-100	1"		6.60
G65PC-125	1 1/4"		9.50
G65PC-150	1 1/2"		9.50
G65PC-200	2"		11.20
G65PC-300	3"		18.50
G65PC-400	4"		31.20

G65PD... POLYPROPYLENE PART D FEMALE NPT COUPLER

G65PD-075	3/4"		\$ 6.30
G65PD-100	1"		7.40
G65PD-125	1 1/4"		9.60
G65PD-150	1 1/2"		10.10
G65PD-200	2"		11.70
G65PD-300	3"		19.40
G65PD-400	4"		33.60

Part No. Size PRICE EACH

G65PE... POLYPROPYLENE PART E HOSE SHANK ADAPTER

G65PE-075	3/4"		\$ 2.20
G65PE-100	1"		2.20
G65PE-125	1 1/4"		2.40
G65PE-150	1 1/2"		2.80
G65PE-200	2"		3.90
G65PE-300	3"		7.90
G65PE-400	4"		14.70

G65PF... POLYPROPYLENE PART F MALE NPT ADAPTER

G65PF-075	3/4"		\$ 2.00
G65PF-100	1"		2.10
G65PF-125	1 1/4"		2.70
G65PF-150	1 1/2"		3.00
G65PF-200	2"		3.90
G65PF-300	3"		8.30
G65PF-400	4"		14.70

G65PDC... POLYPROPYLENE PART DC DUST CAP

G65PDC-075	3/4"		\$ 5.10
G65PDC-100	1"		6.60
G65PDC-125	1 1/4"		9.10
G65PDC-150	1 1/2"		9.30
G65PDC-200	2"		10.10
G65PDC-300	3"		16.60
G65PDC-400	4"		26.60

G65PDP... POLYPROPYLENE PART DP DUST PLUG

G65PDP-075	3/4"		\$ 1.80
G65PDP-100	1"		1.80
G65PDP-125	1 1/4"		2.40
G65PDP-150	1 1/2"		2.50
G65PDP-200	2"		2.70
G65PDP-300	3"		6.50
G65PDP-400	4"		10.50

Safety Note: Cam-locks should not be used with compressed air or other compressed gases.

Brass cam-locks are used where the application requires corrosion resistance or extra strength. For example, they are popular in marine refueling where durability, salt water resistance, and non-sparking features are all important. G65BR couplings are manufactured from copper alloy grade 377 to the Commercial Item Description (CID) #A-A-59326B specification. Female couplers are supplied with locking clips.

BRASS WORKING PRESSURES:

1/2" to 2"	250 psi
2-1/2" to 4"	150
5" & 6"	75
8"	50

Standard gaskets are rated to 105°C (221°F)

Safety Note: Cam-locks should not be used with compressed air or other compressed gases.

Part No.	Size	IMPA Code	PRICE EACH
----------	------	-----------	------------

G65BRA... BRASS PART A FEMALE NPT ADAPTER

G65BRA-075	3/4"	35-17-16	\$ 8.80
G65BRA-100	1"	35-17-17	10.10
G65BRA-125	1 1/4"	35-17-18	13.20
G65BRA-150	1 1/2"	35-17-19	15.10
G65BRA-200	2"	35-17-20	19.50
G65BRA-250	2 1/2"	35-17-21	27.90
G65BRA-300	3"	35-17-22	34.20
G65BRA-400	4"	35-17-23	60.80
G65BRA-600	6"	35-17-25	119.00



G65BRB... BRASS PART B MALE NPT COUPLER

G65BRB-075	3/4"	35-18-66	\$ 16.90
G65BRB-100	1"	35-18-67	19.90
G65BRB-125	1 1/4"	35-18-68	27.30
G65BRB-150	1 1/2"	35-18-69	27.50
G65BRB-200	2"	35-18-70	30.90
G65BRB-250	2 1/2"	35-18-71	42.50
G65BRB-300	3"	35-18-72	54.50
G65BRB-400	4"	35-18-73	77.90
G65BRB-600	6"	35-18-75	171.90



G65BRC... BRASS PART C HOSE SHANK COUPLER

G65BRC-075	3/4"	35-20-15	14.70
G65BRC-100	1"	35-20-16	19.80
G65BRC-125	1 1/4"	35-20-17	22.40
G65BRC-150	1 1/2"	35-20-18	25.80
G65BRC-200	2"	35-20-19	33.00
G65BRC-250	2 1/2"	35-20-20	45.50
G65BRC-300	3"	35-20-21	58.40
G65BRC-400	4"	35-20-22	88.20
G65BRC-600	6"	35-20-24	227.00



G65BRD... BRASS PART D FEMALE NPT COUPLER

G65BRD-075	3/4"	35-18-16	\$ 17.20
G65BRD-100	1"	35-18-17	21.80
G65BRD-125	1 1/4"	35-18-18	24.40
G65BRD-150	1 1/2"	35-18-19	28.30
G65BRD-200	2"	35-18-20	32.40
G65BRD-250	2 1/2"	35-18-21	47.10
G65BRD-300	3"	35-18-22	57.00
G65BRD-400	4"	35-18-23	90.80
G65BRD-600	6"	35-18-25	211.50



Number	Size	IMPA Code	PRICE EACH
--------	------	-----------	------------

G65BRE... BRASS PART E HOSE SHANK ADAPTER

G65BRE-075	3/4"	35-19-15	\$ 10.20
G65BRE-100	1"	35-19-16	11.90
G65BRE-125	1 1/4"	35-19-17	15.00
G65BRE-150	1 1/2"	35-19-18	17.80
G65BRE-200	2"	35-19-19	26.70
G65BRE-250	2 1/2"	35-19-20	34.60
G65BRE-300	3"	35-19-21	49.00
G65BRE-400	4"	35-19-22	75.40
G65BRE-600	6"	35-19-24	207.50



G65BRF... BRASS PART F MALE NPT ADAPTER

G65BRF-075	3/4"	35-17-66	\$ 10.50
G65BRF-100	1"	35-17-67	12.90
G65BRF-125	1 1/4"	35-17-68	18.20
G65BRF-150	1 1/2"	35-17-69	19.50
G65BRF-200	2"	35-17-70	25.30
G65BRF-250	2 1/2"	35-17-71	40.30
G65BRF-300	3"	35-17-72	47.50
G65BRF-400	4"	35-17-73	84.20
G65BRF-600	6"	35-17-75	162.10



G65BRDC... BRASS PART DC DUST CAP

G65BRDC-075	3/4"	35-20-65	\$ 14.60
G65BRDC-100	1"	35-20-66	16.90
G65BRDC-125	1 1/4"	35-20-67	22.70
G65BRDC-150	1 1/2"	35-20-68	23.90
G65BRDC-200	2"	35-20-69	27.10
G65BRDC-250	2 1/2"	35-20-70	35.00
G65BRDC-300	3"	35-20-71	45.60
G65BRDC-400	4"	35-20-72	66.00
G65BRDC-600	6"	35-20-74	142.70



G65BRDP... BRASS PART DP DUST PLUG

G65BRDP-075	3/4"	35-19-65	\$ 9.20
G65BRDP-100	1"	35-19-66	10.60
G65BRDP-125	1 1/4"	35-19-67	12.60
G65BRDP-150	1 1/2"	35-19-68	12.30
G65BRDP-200	2"	35-19-69	16.20
G65BRDP-250	2 1/2"	35-19-70	23.10
G65BRDP-300	3"	35-19-71	26.10
G65BRDP-400	4"	35-19-72	41.50
G65BRDP-600	6"	35-19-74	112.00



Our stainless couplings are manufactured from type 316 stainless for maximum corrosion resistance. Care is taken at the factory to ensure a smooth finish on wetted surfaces to minimize bacteria build-up in sanitary applications. Ductile iron cam-locks are not plated. Female couplers are supplied with locking clips.

WORKING PRESSURES

	STAINLESS STEEL	DUCTILE IRON
3/4" to 2"	250 psi	125 psi
3	200	100
4	100	100
6	75	75

Standard gaskets are rated to 105°C (221°F)

Safety Note: Cam-locks should not be used with compressed air or other compressed gases.

Part No.	Size	IMPA Code	PRICE EACH
----------	------	-----------	------------

G65SSA... STAINLESS STEEL PART A FEMALE NPT ADAPTER

G65SSA-075	3/4"	35-17-32	\$ 8.60
G65SSA-100	1"	35-17-33	11.10
G65SSA-125	1 1/4"	35-17-34	15.70
G65SSA-150	1 1/2"	35-17-35	18.40
G65SSA-200	2"	35-17-36	22.30
G65SSA-250	2 1/2"	35-17-37	39.90
G65SSA-300	3"	35-17-38	43.50
G65SSA-400	4"	35-17-39	73.40
G65SSA-600	6"	35-17-41	162.90



Part No.	Size	IMPA Code	PRICE EACH
----------	------	-----------	------------

G65SSE... STAINLESS STEEL PART E HOSE SHANK ADAPTER

G65SSE-075	3/4"	35-19-31	\$ 7.80
G65SSE-100	1"	35-19-32	12.50
G65SSE-125	1 1/4"	35-19-33	17.90
G65SSE-150	1 1/2"	35-19-34	22.60
G65SSE-200	2"	35-19-35	32.20
G65SSE-250	2 1/2"	35-19-36	55.60
G65SSE-300	3"	35-19-37	62.20
G65SSE-400	4"	35-19-38	96.40
G65SSE-600	6"	35-19-40	272.20



G65SSB... STAINLESS STEEL PART B MALE NPT COUPLER

G65SSB-075	3/4"	35-18-82	\$ 15.10
G65SSB-100	1"	35-18-83	19.20
G65SSB-125	1 1/4"	35-18-84	28.00
G65SSB-150	1 1/2"	35-18-85	29.20
G65SSB-200	2"	35-18-86	34.30
G65SSB-250	2 1/2"	35-18-87	55.90
G65SSB-300	3"	35-18-88	63.60
G65SSB-400	4"	35-18-89	89.70
G65SSB-600	6"	35-18-91	226.50



G65SSF... STAINLESS STEEL PART F MALE NPT ADAPTER

G65SSF-075	3/4"	35-17-82	\$ 10.90
G65SSF-100	1"	35-17-83	13.80
G65SSF-125	1 1/4"	35-17-84	22.70
G65SSF-150	1 1/2"	35-17-85	25.40
G65SSF-200	2"	35-17-86	32.00
G65SSF-250	2 1/2"	35-17-87	47.50
G65SSF-300	3"	35-17-88	57.90
G65SSF-400	4"	35-17-89	103.00
G65SSF-600	6"	35-17-91	229.20



G65SSC... STAINLESS STEEL PART C HOSE SHANK COUPLER

G65SSC-075	3/4"	35-20-31	\$ 14.30
G65SSC-100	1"	35-20-32	18.40
G65SSC-125	1 1/4"	35-20-33	27.80
G65SSC-150	1 1/2"	35-20-34	28.60
G65SSC-200	2"	35-20-35	39.90
G65SSC-250	2 1/2"	35-20-36	64.20
G65SSC-300	3"	35-20-37	77.30
G65SSC-400	4"	35-20-38	103.70
G65SSC-600	6"	35-20-40	264.80



G65SSDC... STAINLESS STEEL PART DC DUST CAP

G65SSDC-075	3/4"	35-20-81	\$ 12.90
G65SSDC-100	1"	35-20-82	16.50
G65SSDC-125	1 1/4"	35-20-83	24.00
G65SSDC-150	1 1/2"	35-20-84	24.00
G65SSDC-200	2"	35-20-85	30.60
G65SSDC-250	2 1/2"	35-20-86	43.50
G65SSDC-300	3"	35-20-87	52.20
G65SSDC-400	4"	35-20-88	71.80
G65SSDC-600	6"	35-20-90	213.00



G65SSD... STAINLESS STEEL PART D FEMALE NPT COUPLER

G65SSD-075	3/4"	35-18-32	\$ 16.10
G65SSD-100	1"	35-18-33	20.70
G65SSD-125	1 1/4"	35-18-34	29.60
G65SSD-150	1 1/2"	35-18-35	31.50
G65SSD-200	2"	35-18-36	39.60
G65SSD-250	2 1/2"	35-18-37	59.90
G65SSD-300	3"	35-18-38	71.60
G65SSD-400	4"	35-18-39	101.50
G65SSD-600	6"	35-18-41	242.40



G65SSDP... STAINLESS STEEL PART DP DUST PLUG

G65SSDP-075	3/4"	35-19-81	\$ 5.70
G65SSDP-100	1"	35-19-82	7.80
G65SSDP-125	1 1/4"	35-19-83	14.00
G65SSDP-150	1 1/2"	35-19-84	13.80
G65SSDP-200	2"	35-19-85	21.50
G65SSDP-250	2 1/2"	35-19-86	36.50
G65SSDP-300	3"	35-19-87	37.20
G65SSDP-400	4"	35-19-88	65.20
G65SSDP-600	6"	35-19-90	144.80



Part No.	Size	Size	PRICE EACH
----------	------	------	------------

G65SSAA... STAINLESS STEEL DOUBLE MALE ADAPTER

G65SSAA-200-200	2"	2"	\$ 100.20
G65SSAA-300-200	3"	2"	122.80
G65SSAA-300-300	3"	3"	163.30
G65SSAA-400-300	4"	3"	211.60
G65SSAA-400-400	4"	4"	215.00



G65SSDD... STAINLESS STEEL DOUBLE FEMALE ADAPTER

G65SSDD-200-200	2"	2"	\$ 125.60
G65SSDD-300-300	3"	3"	192.40
G65SSDD-400-400	4"	4"	283.20



G65SSCA... STAINLESS STEEL REDUCER

	Female	Male	
G65SSCA-200-300	2"	3"	\$ 154.40
G65SSCA-300-200	3"	2"	159.70
G65SSCA-300-400	3"	4"	188.00
G65SSCA-400-300	4"	3"	229.20
G65SSCA-600-400	6"	4"	464.10



Part No.	Size	IMPA Code	PRICE EACH
----------	------	-----------	------------

G65DIA... DUCTILE IRON PART A FEMALE NPT ADAPTER

G65DIA-200	2"		\$ 23.00
G65DIA-300	3"		43.60
G65DIA-400	4"		75.60
G65DIA-600	6"		171.60

G65DIC... DUCTILE IRON PART C HOSE SHANK COUPLER

G65DIC-200	2"		\$ 45.80
G65DIC-300	3"		72.90
G65DIC-400	4"		134.10
G65DIC-600	6"		222.50

G65DID... DUCTILE IRON PART D FEMALE NPT COUPLER

G65DID-200	2"		\$ 46.70
G65DID-300	3"		80.00
G65DID-400	4"		102.40
G65DID-600	6"		220.80

G65DIE... DUCTILE IRON PART E HOSE SHANK ADAPTER

G65DIE-200	2"		\$ 30.60
G65DIE-300	3"		45.50
G65DIE-400	4"		84.50
G65DIE-600	6"		195.70

G65DIDC... DUCTILE IRON PART DC DUST CAP

G65DIDC-200	2"		\$ 40.90
G65DIDC-300	3"		54.00
G65DIDC-400	4"		79.60

CAM-LOCKS FOR INTERLOCKING CRIMP FERRULES

G64SS fittings feature a collar that, when used with G3F crimp ferrules, locks the coupling to the ferrule for extra fitting retention.

G64SSC... CRIMP STYLE HOSE SHANK COUPLER

G64SSC-150	1 1/2"	\$ 28.60
G64SSC-200	2"	39.90
G64SSC-300	3"	77.30
G64SSC-400	4"	103.70



G64SSE... CRIMP STYLE HOSE SHANK COUPLER

G64SSE-150	1 1/2"	\$ 22.60
G64SSE-200	2"	32.20
G64SSE-300	3"	62.20
G64SSE-400	4"	96.40



when crimped, the ferrule locks into the coupling collar as shown...

Safety Note: Cam-locks should not be used with compressed air or other compressed gases.

Standard G65X Gaskets are made from buna-N (nitrile) rubber. We also stock common sizes of viton rubber gaskets as shown below for special chemical applications. Other sizes of viton gaskets as well as gaskets of other material are available on special order.

Temperature Range: G65X -35°C (-31°F) to 105°C (221°F)
G65VX -18°C (0°F) to 180°C (356°F)

Part No. Size PRICE EACH

G65X... CAM-LOCK GASKET

G65X-050	1/2"	\$ 0.50
G65X-075	3/4"	0.50
G65X-100	1"	0.60
G65X-125	1 1/4"	0.70
G65X-150	1 1/2"	0.70
G65X-200	2"	0.70
G65X-250	2 1/2"	1.10
G65X-300	3"	1.20
G65X-400	4"	1.50
G65X-500	5"	3.30

G65X-600	6"	3.60
G65X-800	8"	10.20
G65X-1000	10"	16.70

Extra Thick Gaskets:

G65THX-200	2"	2.10
G65THX-300	3"	2.70
G65THZ-400	4"	3.40

Viton Gaskets:

G65VX-075	3/4"	6.20
G65VX-100	1"	7.20
G65VX-125	1 1/4"	8.90
G65VX-150	1 1/2"	11.30
G65VX-200	2"	14.20
G65VX-300	3"	20.10
G65VX-400	4"	30.90

G65Y... BRASS CAM-ARM c/w finger ring & pin

G65Y-075	3/4"	\$ 1.90
G65Y-100	1"	2.50
G65Y-125	1 1/4" up to 2 1/2"	3.70
G65Y-300	3" up to 5"	5.50
G65Y-600	6"	11.30
G65Y-800	8"	12.30

G65SSY... STAINLESS STEEL CAM-ARM c/w finger ring & pin

G65SSY-075	3/4"	\$ 2.50
G65SSY-100	1"	3.50
G65SSY-125	1 1/4" up to 2 1/2"	5.00
G65SSY-300	3" up to 4"	7.70
G65SSY-600	6"	25.00

G65LY... LOCKING CAM-ARM c/w finger ring, pin & lock-plate

G65LY-200	\$ 30.50
G65LY-300	46.30

Note: G65Y LY Locking Arms can only be installed on G65L series couplers

Part No. Size PRICE EACH

G65SC... CAM-LOCK SAFETY LOCK CLIP

G65SC	Safety clip	\$ 0.50
G65SC-600	Safety clip for 6"	1.90

G65R... CAM-LOCK RING

G65R	Standard cam-lock ring	\$ 0.80
------	------------------------	---------

G65SSZ... SECURITY CHAIN WITH S-HOOKS

G65SSZX6	6" Stainless Steel	\$ 3.75
G65SSZX12	12" Stainless Steel	5.40

G65VS... VELCRO ARM STRAPS

	Diameter	Cam-Lock Size	
G65VS-200	2"-4"	1 1/2"-2 1/2"	\$ 6.70
G65VS-300	3 1/2"-6"	2 1/2"-4"	7.10
G65VS-400	4 1/2"-10"	4"-6"	9.20

G65ST... ALUMINUM STRAINER

G65ST-200	2" NPT	\$ 49.00
G65ST-300	3" NPT	69.10
G65ST-400	4" NPT	93.40

This strainer has 1/4" holes and threads into female NPT threads.

G65SST... STAINLESS STRAINER

G65SST-200	2" NPT	\$ 114.00
G65SST-300	3" NPT	189.50
G65SST-400	4" NPT	198.00

Safety Bumps™ replace traditional cam and groove caps and plugs, providing a comfortable handle for the driver's hand and a "bump" that extends beyond the hose fittings and ears, protecting them from damage.

Safety Bumps™ are available in two, three and four inch, male and female models, in both hazardous and food grade configurations.

Safety Bumps™ are made from a glass-filled black composite with an antistatic additive. White food-grade certified fittings are available on special order, as are blue fittings for non-flammable products.

Standard black Safety Bumps™ are biodiesel and ethanol safe.

Part No.	Size	PRICE EACH
----------	------	------------

Safety Bump Dust Caps

G65SBDC-200	2"	\$36.00
G65SBDC-300	3" T	51.20
G65SBDC-400	4"	60.40



Safety Bump Dust Plugs

G65SBDP-200	2"	\$ 27.20
G65SBDP-300	3"	39.00
G65SBDP-400	4"	49.00



Replacement Arms for Safety Bump Dust Caps

G65SBY-200	Fits 2"	\$3.50
G65SBY-300	Fits 3" & 4"	4.25

Safety Locks™ are a companion product for the Safety Bump™ product line.

Safety Lock™ eliminates the chance for cam lock ears to open up during deliveries due to pulsing or vibration. Spills due to cam lock ears opening up have plagued the industry for years. Velcro straps tear and wear out against the edges of the ears and, like various other ear locking solutions, are difficult to use with gloved hands.

Safety Locks™ are made from a rugged material for long life and work with Green Line® standard female hose fittings with split rings.

It is recommended that Safety Locks™ be tethered to either the hose fitting split ring or to a Safety Bump™ to prevent loss and to allow the cable to be used to easily remove the Safety Lock™.

Safety Locks

G65SL-200	2"	\$ 5.50
G65SL-300	3"	6.60
G65SL-400	4"	8.20



Hose I.D.	Part No.	Weight Each	PRICE EACH
-----------	----------	-------------	------------

COMPOSITE HOSE FITTINGS...



Carbon Steel Male NPT Inserts

2"	G81-200	0.36 lb	\$ 49.90
3	G81-300	0.73	63.10
4	G81-400	1.32	87.30

Type 304 Stainless Steel Male NPT Inserts*

1 1/2"	G81SS-150	0.27	\$ 95.00
2"	G81SS-200	0.36	100.10
3	G81SS-300	0.73	182.50
4	G81SS-400	1.32	225.00

*Type 316 also available on special order.

Nitrile Sealing Gasket

1 1/2"	G82-150	0.01	\$ 6.40
2	G82-200	0.01	6.90
3	G82-300	0.02	13.10
4	G82-400	0.02	14.90

Carbon Steel Ferrules

1 1/2"	G83-150	0.05	\$ 19.80
2	G83-200	0.10	23.00
3	G83-300	0.17	28.00
4	G83-400	0.32	38.90

These low pressure couplings are designed for use with gravity feed or low pressure fuel dispensing hoses. The 3/4" & 1" sizes are made from diecast zinc with zinc dichromate plating. The 1 1/4" size is aluminum.

Part No.	Pipe Size	Hose Size	PRICE EACH Loose	EACH Std Pkg	Pkg Qty
G21Z... FARM TANK COUPLING					
G21Z-075	3/4"	3/4"	\$ 4.00	\$ 3.50	5
G21Z-100	1"	1"	5.40	4.90	5
G33A-125	1 1/4"	1 1/4"		14.30	1



CURB PUMP FITTINGS

G21C couplings are machined from brass and then chrome plated. Reusable couplings can be installed with wrenches but permanent fittings are installed using a Scovil style internal expansion machine. All curb pump fittings should be grounded to the wire reinforcement of the hose using a staple or pin during assembly. Correct matching of hose outside diameter to the coupling is necessary to ensure good coupling retention.

Part No.	Pipe Size	Hose I.D.	Size O.D.	PRICE EACH
G21C... PERMANENT CURB PUMP FITTING				
G21C-075-113	3/4"	3/4"	1.13"	\$ 12.50
G21C-075-125	3/4"	3/4"	1.25"	25.50
G21C-100-150	1"	1"	1.50"	23.90



G21CRLM... LIVE SWIVEL REUSABLE CURB PUMP FITTING

G21CRLM-075-113	3/4"	3/4"	1.13"	\$ 24.40
G21CRLM-075-125	3/4"	3/4"	1.25"	39.60
G21CRLM-100-150	1"	1"	1.50"	63.40



INTERNAL EXPANSION COUPLINGS

Internal expansion couplings are manufactured from solid brass forgings. Ferrules are cold-drawn copper alloy. These couplings can only be installed using a Scovil type internal expansion machine. Internal expansion couplings are most commonly found in home fuel oil or marine refueling applications.

Part No.	Pipe Size	Hose Size	PRICE EACH
G61... BRASS MALE NPT			
G61-075	3/4"	3/4"	33.50
G61-100	1"	1"	31.60
G61-125	1 1/4"	1 1/4"	33.10
G61-150	1 1/2"	1 1/2"	40.80
G61-200	2"	2"	74.40
G61-250	2 1/2"	2 1/2"	180.50
G61-300	3"	3"	212.90



G62... BRASS FEMALE NPSM

G62-075	3/4"	3/4"	\$ 59.90
G62-100	1"	1"	60.20
G62-125	1 1/4"	1 1/4"	61.60
G62-138	1 1/2"	1 3/8"	66.70
G62-150	1 1/2"	1 1/2"	77.80
G62-200	2"	2"	109.40
G62-250	2 1/2"	2 1/2"	227.10
G62-300	3"	3"	376.10



G63... FERRULES

	Hose I.D.	
G63-075	3/4"	\$ 12.60
G63-100	1"	12.00
G63-125	1 1/4"	14.50
G63-138	1 3/8"	21.80
G63-150	1 1/2"	18.40
G63-200	2"	28.70
G63-250	2 1/2"	54.70
G63-300	3"	71.30



Specify ferrule letter designation from chart below to match hose O.D.


Hose	Hose O.D. and Ferrule Designation						
I.D.	AAA	AA	A	B	C	D	E
3/4"		1.17"	1.22"	1.27"	1.32"	1.37"	
1		1.47	1.51	1.55	1.60	1.64	1.69
1 1/4		1.69	1.75	1.80	1.86	1.91	1.97
1 3/8				1.80	1.86	1.91	1.97
1 1/2	1.90	1.97	2.04	2.10	2.16	2.22	2.29
2		2.46	2.53	2.59	2.66	2.72	2.79
2 1/2		2.95	3.03	3.10	3.18	3.25	3.33
3	3.55	3.62	3.70	3.77	3.85	3.92	4.00
4	4.56	4.59	4.63	4.66	4.69	4.72	4.75

Utility nozzles are suitable for gravity feed or 12 volt utility pumps only. Please note that automotive filler necks on newer (unleaded gas) vehicles will only accept the 3/4" spout. The large capacity 1-1/4 nozzle is generally used for diesel service and is rated to 25 psi maximum.

Part No.	Spout Size	Thread Size	Cross Reference	Description	PRICE EACH
----------	------------	-------------	-----------------	-------------	------------


G67... UTILITY NOZZLES

G67-075-100	3/4"	1" NPT		Basic Nozzle	\$ 37.80
-------------	------	--------	--	--------------	----------

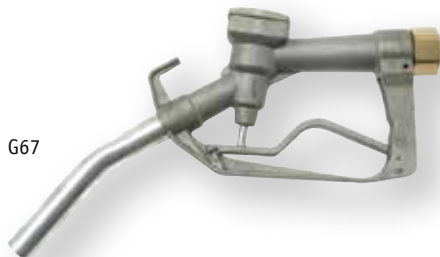

G67

G67UL-075-100	3/4"	1"	900W34S	UL/ULC listed straight spout	\$ 56.00
G67UL-100-100	1"	1"	900S	UL/ULC listed straight spout	54.30

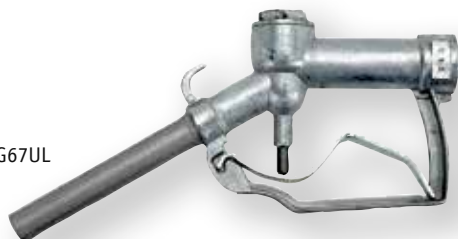

G67UL

G67ULB-075-100	3/4"	1"	900W34B	UL/ULC listed bent spout	\$ 60.40
G67ULB-100-100	1"	1"	900B	UL/ULC listed bent spout	56.00



G67ULB

G67-125-125	1 1/4"	1 1/4"	1250-94	Low pressure bulk nozzle	\$ 172.30
-------------	--------	--------	---------	--------------------------	-----------



G67

G68 nozzles are designed for manual operation (no automatic shut-off) and are generally used for bulk oil delivery. G68A nozzles are used in card lock or industrial truck refueling stations and feature venturi type automatic shut-offs. Both series are aluminum construction with a bronze trigger and handle high pressures and flows up to 300 litres per minute. Please note that a minimum of 29 litres per minute of flow is required for the automatic shut-off to function. When supplied with a break-away spout, this nozzle meets UL/ULC requirements.

Part No.	Spout Size	Thread Size	Cross Reference	Description	PRICE EACH
----------	------------	-------------	-----------------	-------------	------------

G68... BULK DELIVERY NOZZLES

G68-125	1 1/4"	1 1/4" NPT	114D	Bulk delivery nozzle	\$ 424.70
G68-150	1 1/2"	1 1/2"	112D	Bulk delivery nozzle	424.70
G68A-150	1 1/2"	1 1/2"	1124D	Automatic shut off nozzle	686.90



G68A

G68AUL-150	1 1/2"	1 1/2"	AN150	UL/ULC Automatic shut off nozzle	\$ 724.00
------------	--------	--------	-------	----------------------------------	-----------



G68AUL

The variety of fuel nozzles now available is quite staggering. Not only are there several brands with varying features, there are also several competing designs of vapor recovery systems in place in different geographic locations. Such vapor recovery systems include varying types of balance systems and vacuum assist systems that require the nozzle to be matched with the pumping and recovery system. Generally these products are supplied by the petroleum equipment distributors that service the pump equipment. Here we offer a limited range of the Husky conventional fueling nozzles, most often found in commercial and industrial dispensing applications.

Due to changes in the National Fire Prevention Code, we can no longer sell nozzles with hold open clips unless they are pressure activated. This means that nozzles with hold open clips will not work on gravity feed systems. The pressure from the pump opens a check valve allowing the fuel to flow. All of the G69 nozzles shown are automatic shut-off and are ULC approved.



3/4" Nozzle



1" Nozzle

Part Number	Cross Reference	Fuel	Thread Size	Hold Open Clip	Grip Color	PRICE EACH
Nozzles without hold open clips (not pressure activated)						
G69ULC-075-B	159408-04	unleaded gas	3/4" NPT	no	black	\$ 114.50
G69ULC-075-R	159408-02	unleaded gas	3/4"	no	red	114.50
G69ULC-100-B	173312-04	diesel or gas	1	no	black	218.00
G69ULC-100-R	173312-02	diesel or gas	1	no	red	218.00
G69ULC-100-Y	173312-05	diesel or gas	1	no	yellow	218.00
Nozzles with hold open clips (pressure activated)						
G69PA-075-B	159504-04	unleaded gas	3/4" NPT	yes	black	114.50
G69PA-075-R	159504-02	unleaded gas	3/4"	yes	red	114.50
G69PA-100-B	177610-04	diesel or gas	1	yes	black	218.00
G69PA-100-R	177610-02	diesel or gas	1	yes	red	218.00
G69PA-100-Y	177610-05	diesel or gas	1	yes	yellow*	218.00

G69SG



		Description		
G69SG-075-B	1808-04	splash guard	black	8.10
G69SG-075-R	1808-02	splash guard	red	8.10
G69SG-100-B	1808-04	splash guard	black	8.10
G69SG-100-R	1808-02	splash guard	red	8.10
G69SG-100-Y	1808-05	splash guard	yellow*	8.10



G69HW

G69HW-075-B	4145-04	hand warmer	black	11.80
G69HW-075-R	4145-02	hand warmer	red	11.80
G69HW-100-B	4740-04	hand warmer	black	15.90
G69HW-100-R	4740-02	hand warmer	red	15.90
G69HW-100-Y	4740-05	hand warmer	yellow*	15.90

*Note: Yellow typically designates diesel service

G0808BV... BREAKAWAY VALVES



G0808BV



G0808BVR

Part Number	Cross Reference	Pipe Size	Description	PRICE EACH
G0808BV-075-075	2273	3/4"	Single use valve	\$ 69.00
G0808BVR-075-075	3360	3/4"	Re-connectable valve	148.00
G0808BVR-100-100	2276	1	Re-connectable valve	218.00

Husky Nozzle Features:

- UL/ULC listed.
- automatically shuts off when gas tank is full.
- nozzle shuts off if it raises above horizontal or falls from the filler neck.
- $\frac{3}{4}$ " nozzle is regulated to 43 litres per minute (10 U.S. GPM) maximum.
- 1" nozzle is for high volume with flow rates up to 325 litres per minute (75 U.S.GPM).
- smooth grip guards included (other colors are available - specify at time of ordering)
- optional splash guards available in various colors.

The 2000L and 2500L are automatic pressure and vacuum relief caps for farm and industrial fuel storage tanks. The normally closed relief valve prevents fuel evaporation and dust contamination. It vents at 2psi pressure or 0.7"Hg vacuum. The body has an NPS male threaded body with a lockable cap (padlock not included).

Part No.	Description	PRICE EACH
----------	-------------	------------

LOCKING VENT CAP



2000L	2" Locking Vent Cap	\$ 53.80
2500L	2½" Locking Vent Cap	53.80

The lockable cap rotates to control gravity flow from above ground storage tanks. (Padlock not included)

Part No.	Pipe Size/Material	Cross Reference	PRICE EACH
----------	--------------------	-----------------	------------

FUEL HOSE SWIVELS

G1608XA-075	$\frac{3}{4}$ " Aluminum/zinc	36S-5080	\$ 45.90
G1608XA-100	1" Aluminum/zinc	36S-5090	71.50



G1608XAU-075	360°- $\frac{3}{4}$ " Aluminum/zinc		\$ 55.00
G1608XAU-100	360°- 1" Aluminum/zinc		103.50



G1608XA-125	1¼" Aluminum	SWMF-125	\$ 199.00
G1608XA-150	1½" Aluminum	SWMF-150	215.00



LOCKABLE ANGLE VALVES



500AV	1" NPT Valve	\$ 94.50
525AV	1¼" NPT Valve	107.60